


DIMENSIONS & SPECIFICATIONS – LEVERS

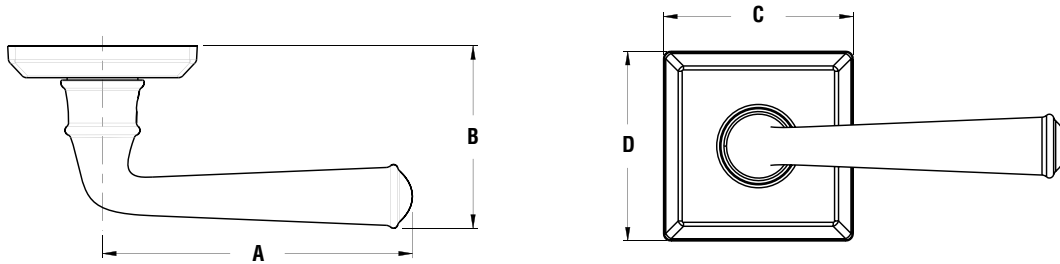

LEVERS

	Arch	Curve	Decorative	Federal	Square	Taper	Tube
A	4-1/2"	3-15/16"	4-1/4"	4-1/2"	4-1/4"	4-1/4"	4-1/4"
B	2-9/16"	2-17/32"	2-1/2"	2-3/4"	2-5/16"	2-7/16"	2-11/32"
B (Keyed)	2-5/32"	2-7/16"	2-9/16"	2-9/16"	2-3/16"	2-1/4"	2-3/16"

ROSES

	Traditional Round	Traditional Arched	Traditional Square	Contemporary Round	Contemporary Square	Rustic Arched	Rustic Square
C	2-9/16"	2-21/32"	2-19/32"	2-9/16"	2-9/16"	2-11/16"	2-5/8"
D	2-9/16"	3-7/16"	2-19/32"	2-9/16"	2-9/16"	4-1/2"	4"

LEVER SPECIFICATIONS

Door Preparation	2-1/8" Cross Bore. 1" edge bore for latch.
Door Thickness	1-3/8" to 2" standard. 2" to 2-1/2" doors optional through thick door option or service part kit.
Cylinder	Baldwin 5-pin C-Keyway.
Backset	Adjustable 2-3/8" or 2-3/4"
Front & Latch	Square Corner Adjustable (SL) standard. Round Corner (RL), Drive In (DL), or 6 Way Adjustable (6L) optional.
Strike	Square Corner (SS) standard. Round Corner (RS), or Dual Strike (DS) optional. Extended Lip strike shipped with all thick door locks (ES).
Latch Bolt	1/2" passage/privacy/entry function bolt.
Handing	With exception to half dummy function, all levers are reversible for right or left hand doors.
ANSI/BHMA	Tested to exceed ANSI/BHMA Grade 2 security.
ADA	Passage (BR352) products meet ADA requirements.
UL	20-minute certified UL option available.